



Xpress CM 100™

Contactless Reader Module

Contactless Technology

The Xpress CM100 reads card data from a variety of contactless sources, including credit cards, key fobs, and NFC-enabled cell phones. It is designed for POS applications that accept contactless transactions, such as quick-service venues and self-service kiosks. Four LED indicators at the top of the module make it easy for cardholders to see that they have completed a successful card read operation.

Easy to Integrate


The Xpress CM100 is designed to allow flexibility of integration of EMV 2.0.1 contactless card reading to different market segments. With its modular architecture, the reader can be mounted to kiosks, attached to terminals, or used as a countertop standalone device. It is also possible to integrate the module with other payment technologies, such as MagStripe readers. The Xpress CM100 is an optional attachment for the ID TECH Sign&Pay terminal.

Versatility

The Xpress CM100 is perfect for a wide variety of applications, including quick service restaurants, ticket booths, parking garages, retail locations, public transportation, and gas stations. With support for Visa payWave, MasterCard PayPass, American Express ExpressPay, Discover Zip and MiFare and NFC technologies, the Xpress CM100 can be integrated into just about any application that accepts contactless technology.

Features and Benefits:

- Reads data from contactless cards, key fobs, and cell phones
- Compact design: Small footprint is ideal for flexible integration
- Complies with EMV Contactless 2.0.1
- Clear identification of successful card reads with LED indicators
- Compatible with ID TECH Sign&Pay terminal
- Certified by:
 - Visa payWave
 - MasterCard PayPass
 - American Express ExpressPay
 - Discover card Zip

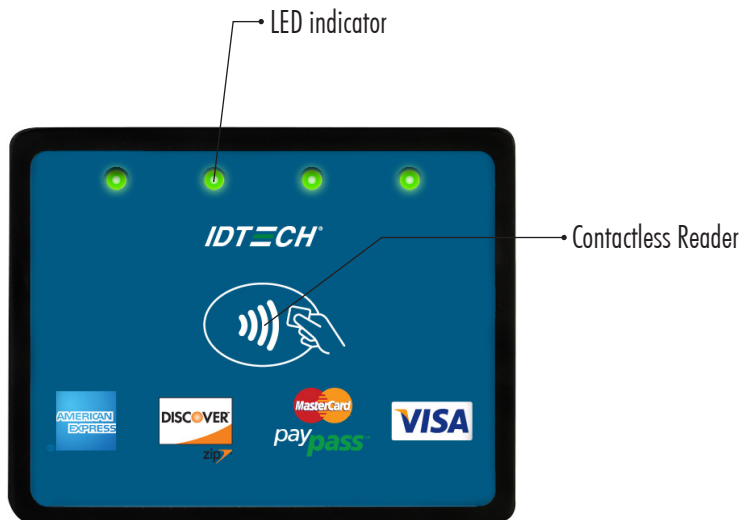

Xpress CM 100™

Specifications IDCA-1261

Electrical

Power Requirements: +5 VDC
Interfaces: USB-HID and RS-232

Environmental

Operating Temperature: -4°F to 158°F (-20°C to 70°C)
Storage Temperature: -40°F to 176°F (-40°C to 70°C)
Humidity: Maximum 95% non-condensing, dry storage



Reliability

Conformance: ISO 14443 Type A & B
Warranty: One year, parts and labor

Mechanical

Dimension (L)x(W)x(H): 0.59 inches (15mm) x 3.71 inches (94.2mm) x 2.96 inches (75.2mm)
Weight: 1.92 oz. (4.78 oz. with cable)
Indicators: Four LED lights and beeper
Cable Length: 3 feet (0.91m)

Footprint:

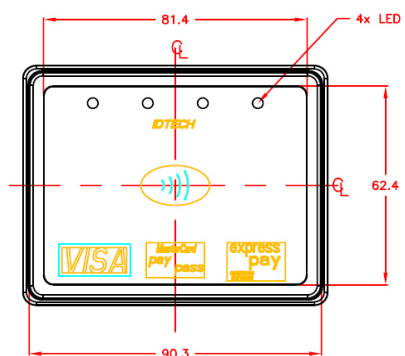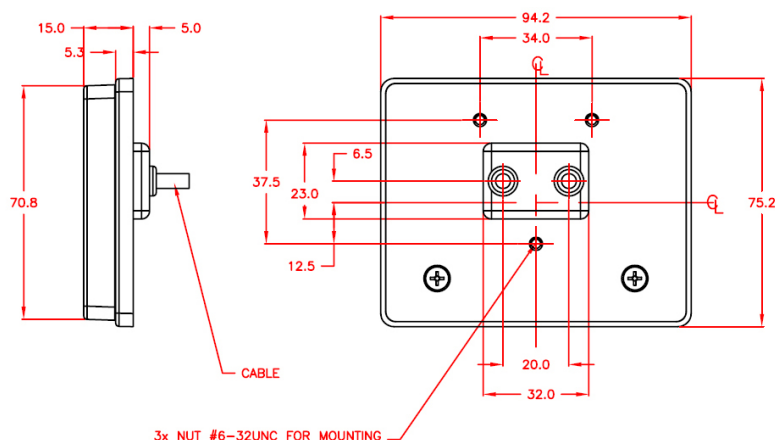

United States Sales Office

Corporate Headquarters

10721 Walker Street
Cypress, CA 90630
Phone: (714) 761-6368
Toll Free: (800) 984-1010
Fax: (714) 761-8880
sales@idtechproducts.com

International Sales Offices

Asia

+866-3-496-6988 (Taiwan)
asia@idtechproducts.com.tw

Canada

+450-465-5261
robertop@idtechproducts.com

South America

+55-11-3079-2255
internationalsales@idtechproducts.com

Europe

Germany & United Kingdom
emea@idtechproducts.com

ISO 9001 Certified

IDTECH®

Value through Innovation

VIVOpay®

www.idtechproducts.com

USB B CE FC